
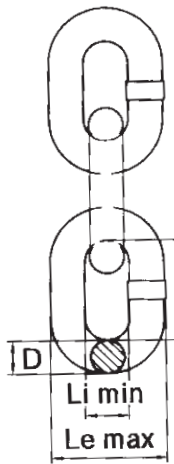


LANAC G100 VISOKOOTPORNI EN 818-2

CHAIN G100 ACCORDING TO EN 818-2

211.1

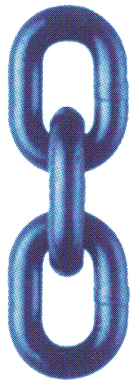

Šifra artikla	Promjer D mm	Korak P(t) mm	Unutarnja širina Li mm	Vanjska širina Le mm	Težina kg/m	Nosivost WLL kg	Probno opterećenje kN	Prekidno opterećenje BF kN
211.2-06	6	18	7,8	22,2	0,9	1400	35,3	56,5
211.2-07	7	21	9,1	25,9	1,2	1900	48,1	77
211.2-08	8	24	10,4	29,6	1,6	2500	62,8	101
211.2-10	10	30	13	37	2,5	4000	98,2	157
211.2-13	13	39	16,9	48,1	4,2	6700	166	265
211.2-16	16	48	20,8	59,2	6,2	10000	251	402
211.2-18	18	54	23,4	66,6	7,4	12500	318	509
211.2-20	20	60	26	74	10	16000	393	628
211.2-22	22	66	28,6	81,4	11,9	19000	475	760
211.2-26	26	78	33,8	96,2	16,3	26500	664	1060

TABLICA DOZVOLJENE NOSIVOSTI

WORKING LOAD LIMITS OF SLINGS

Vrsta lan. priveza		jednostruke		dvostruke		dvostruke		tri i četverostruke					
Kut nagiba β		do 45°		45° do 60°		do 45°		45° do 60°		do 45°		45° do 60°	
Faktor opterećenja		1	0,8	1,4	1	1,12	0,8	2,1	1,5	1,6	1,4	2,1	
Nosivosti (kg)													
mm	kg	kg	kg	kg	kg	kg	kg	kg	kg	kg	kg	kg	kg
6	1400	1120	2000	1400	1600	1120	3000	2120	2240	2300	1700		
7	1900	1500	2650	1900	2120	1500	4000	2800	3000				
8	2500	2000	3550	2500	2800	2000	5300	3750	4000	4200	3000		
10	4000	3150	5600	4000	4250	3150	8000	6000	6300	6700	4750		
13	6700	5300	9500	6700	7500	5300	14000	10000	10600	11200	8000		
16	10000	8000	14000	10000	11200	8000	21200	15000	16000	17000	11800		
18	12500	10000	18000	12500	14000	10000	26500	19000	20000	21200	15000		
20	16000	12800	22400	16000	17920	12800	33600	24000	25600				
22	19000	15000	26500	19000	21200	15000	40000	28000	30000	31500	22400		
26	26500	21200	37100	26500	29680	21200	55650	39750	42400	45000	32000		